




HABERMANN AURUM
PUMPEN



DOMO 150

Handy Pump

50 Hz


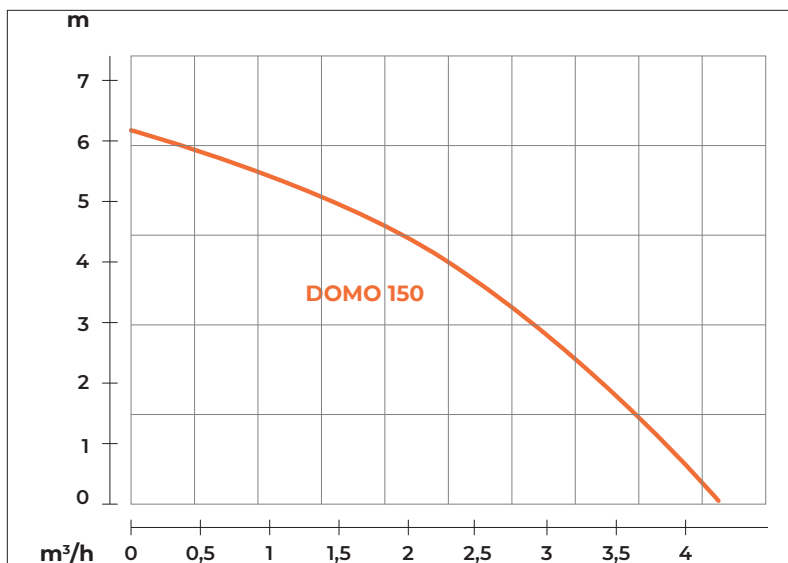


Shaft Speed : 2850 rpm

Solid Passage : 6 mm



Outlet : 25mm, 1in

OUTPUT	HEAD	FLOW
0.15 kW	Rated : 4m, 13ft	Rated : 0.7 l/s, 11gpm
0.2 HP	Max : 6.3m, 21ft	Max : 1.2 l/s, 18 gpm

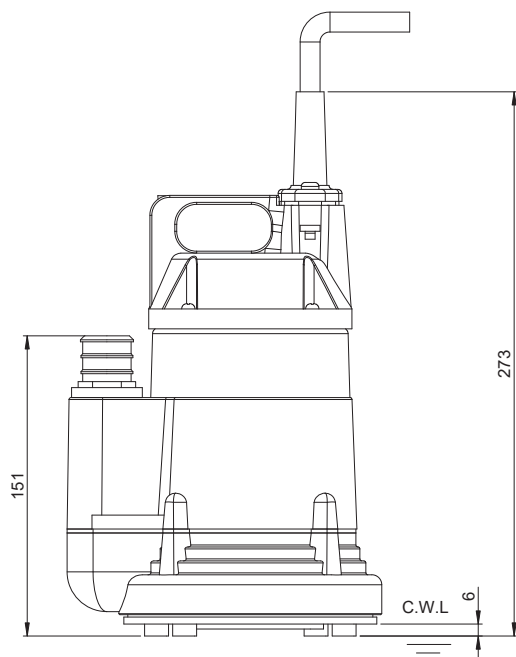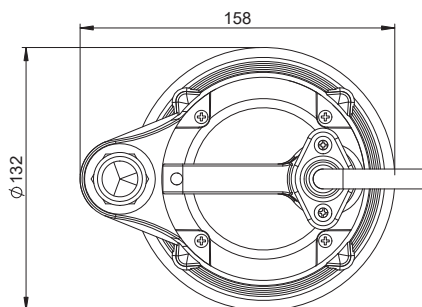


Weight : 3.2kg / 7.04lbs

Pump Type		Electric Submersible Pumps
		1-Phase
		IP 68
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter Method	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Opened
Shaft Seal		Oil Seal
Bearings		Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Aluminum
	Impeller	Techno-polymer
	Motor Frame	Aluminum
	Motor Shaft	Carbon Steel
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		pH 5 - pH 8

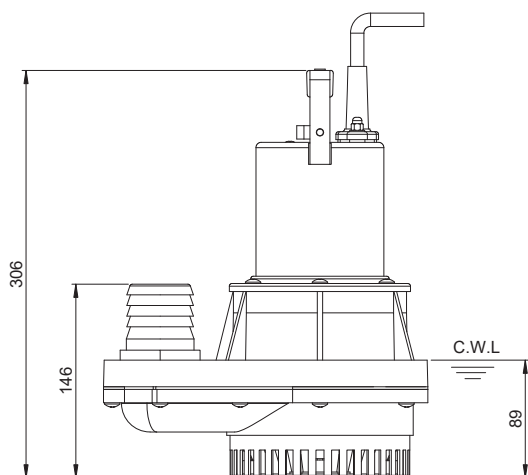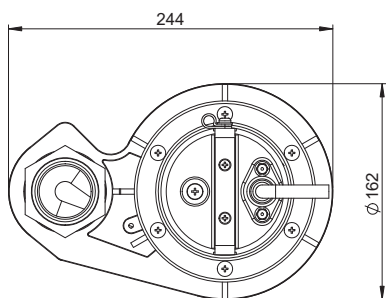

Weight : 4kg / 8.8 lbs

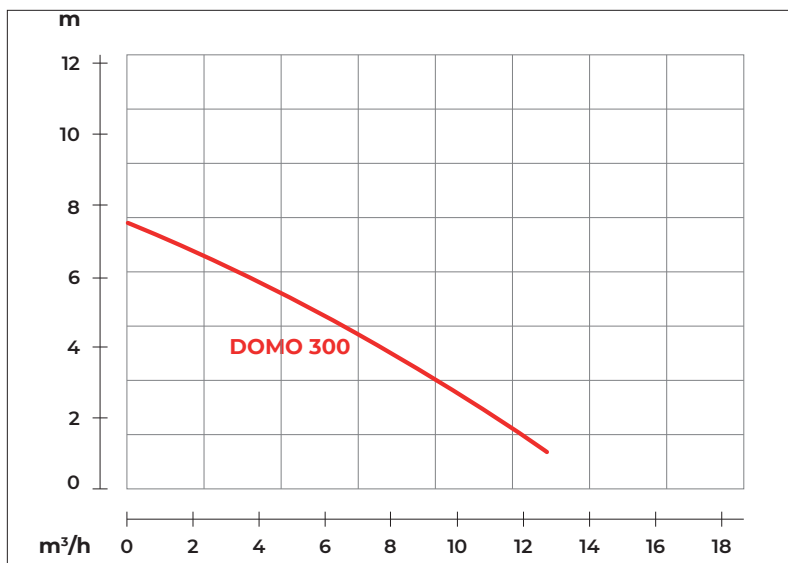


Shaft Speed : 2850 rpm

Solid Passage : 6 mm

Outlet : 50mm, 2in

OUTPUT	HEAD	FLOW
0.25 kW	Rated : 5m, 16ft	Rated : 1.5 l/s, 24 gpm
0.33 HP	Max : 7.5m, 25ft	Max : 3.3 l/s, 53 gpm



Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal		Single Mechanical Seal
		Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Stainer	Plastic
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8

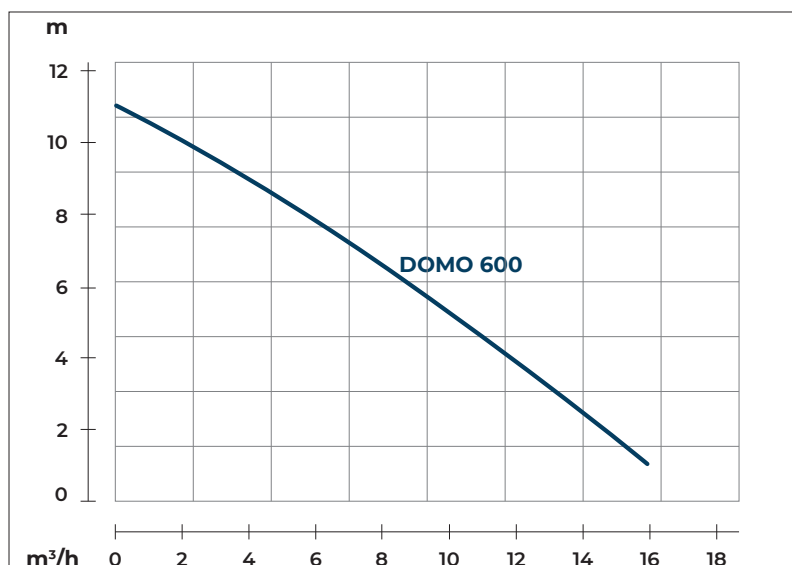

Shaft Speed : 2850 rpm

Solid Passage : 6 mm



Outlet : 50mm, 2in

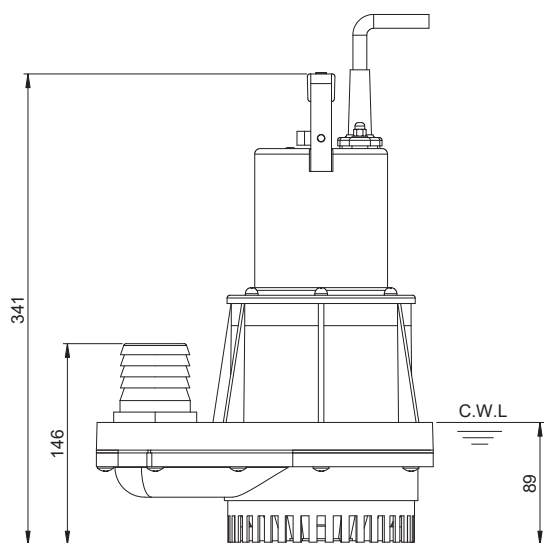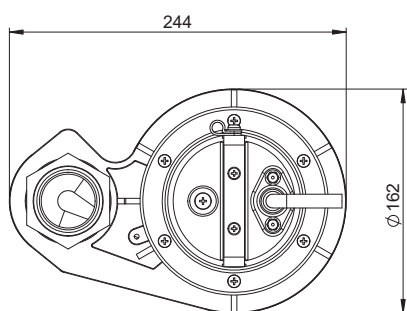


Weight : 6kg / 13.2 lbs

OUTPUT	HEAD	FLOW
0.55 kW	Rated : 8m, 26ft	Rated : 1.5 l/s, 24 gpm
0.75 HP	Max : 11m, 36ft	Max : 4.2 l/s, 66 gpm

Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal		Single Mechanical Seal
		Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Stainer	Plastic
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8

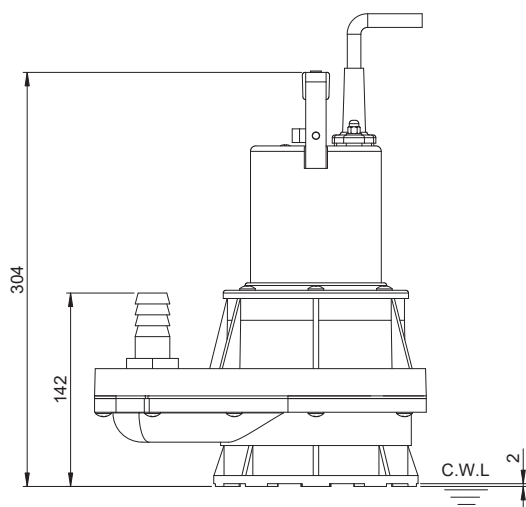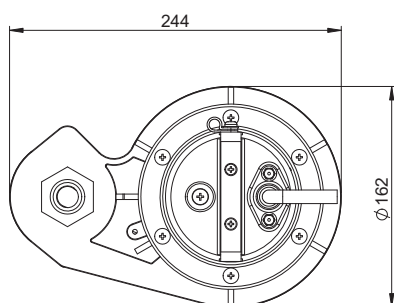

Weight : 4kg / 8.8 lbs

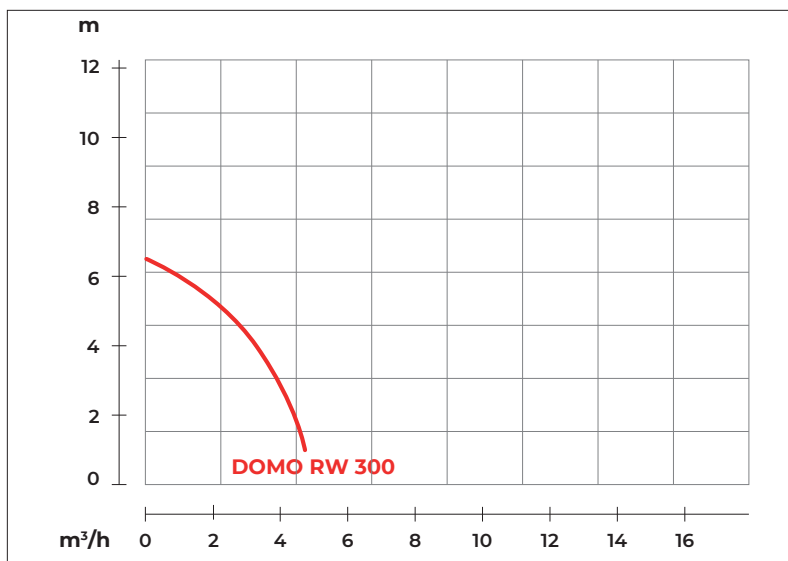


Shaft Speed : 2850 rpm

Solid Passage : 2 mm

Outlet : 25mm, 1in

OUTPUT	HEAD	FLOW
0.25 kW	Rated : 4m, 13ft	Rated : 0.9 l/s, 15 gpm
0.33 HP	Max : 6.5m, 21ft	Max : 1.3 l/s, 21 gpm



Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal	Single Mechanical Seal	
	Ceramic / Carbon	
Bearings		C3 Shielded ball bearings
Cable	H07RNF	
	Length: 10m (33ft) or longer upon request.	
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Bottom Plate	Plastic
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8

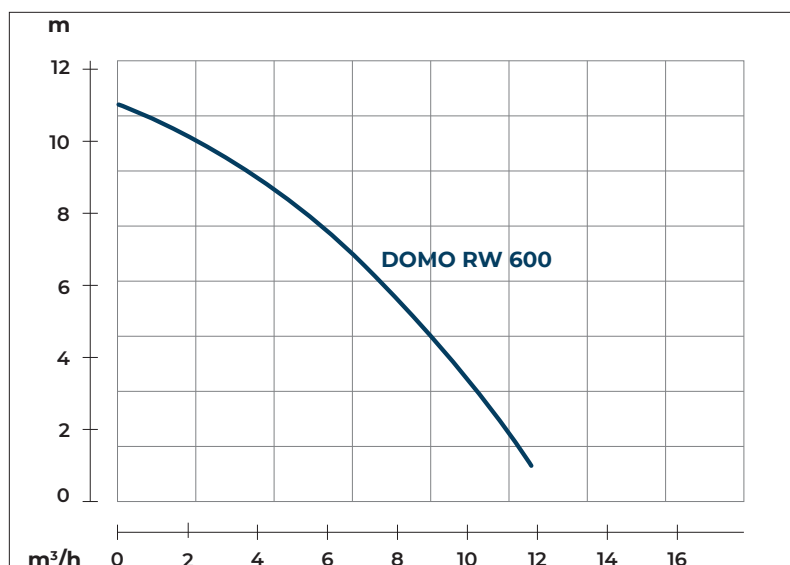

Shaft Speed : 2850 rpm

Solid Passage : 5 mm

Outlet : 50mm, 2in

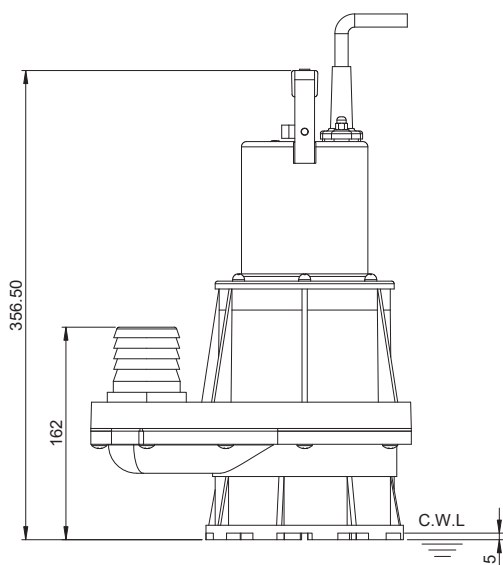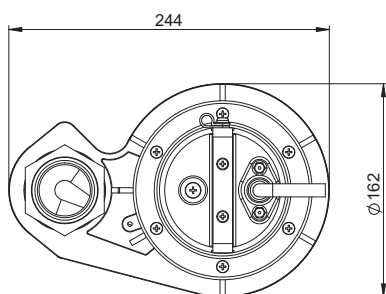

Weight : 6kg / 13 lbs

OUTPUT	HEAD	FLOW
0.55 kW	Rated : 8m, 26ft	Rated : 1.5 l/s, 24 gpm
0.75 HP	Max : 11m, 36ft	Max : 3.3 l/s, 53 gpm

Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal		Single Mechanical Seal
		Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Bottom Plate	Plastic
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8





HABERMANN AURUM
PUMPEN


DOMO SEW 300

Handy Pump

50 Hz

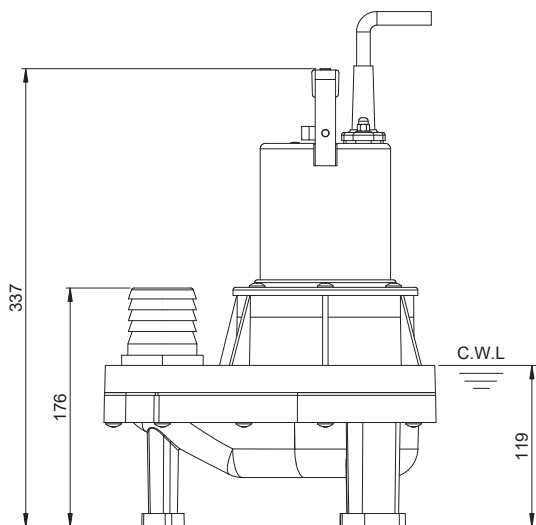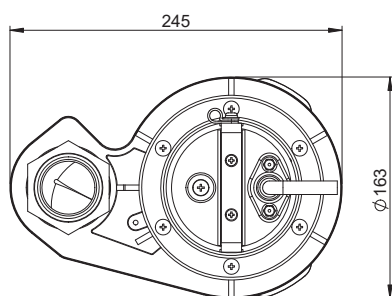

Weight : 4.2kg / 9.3 lbs

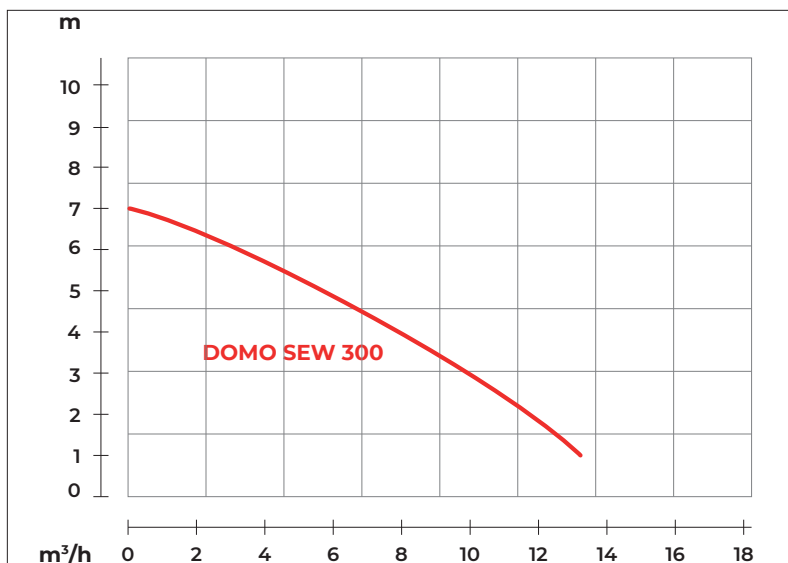


Shaft Speed : 2850 rpm

Solid Passage : 35 mm

Outlet : 50mm, 2in

OUTPUT	HEAD	FLOW
0.25 kW	Rated : 4m, 13ft	Rated : 2.2 l/s, 34 gpm
0.33 HP	Max : 7m, 23ft	Max : 3.7 l/s, 58 gpm

Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal		Single Mechanical Seal
		Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8


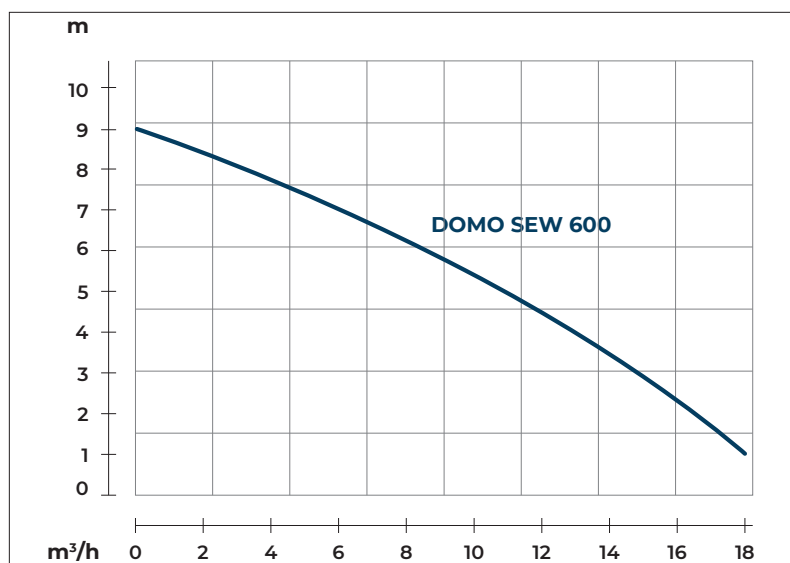


Shaft Speed : 2850 rpm

Solid Passage : 35 mm

Outlet : 50mm, 2in

OUTPUT	HEAD	FLOW
0.55 kW	Rated : 7m, 23ft	Rated : 1.7 l/s, 26 gpm
0.75 HP	Max : 9m, 30ft	Max : 5 l/s, 79 gpm

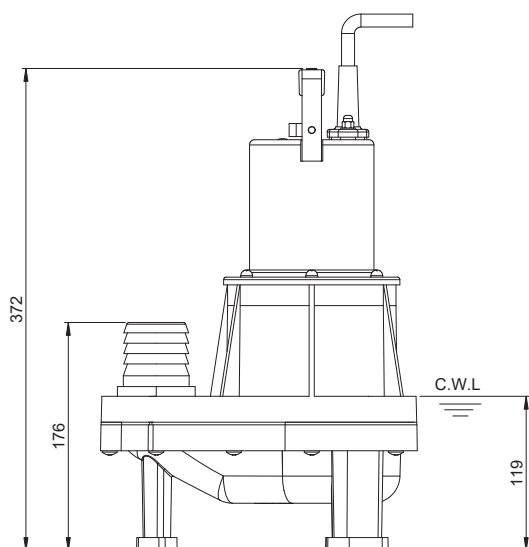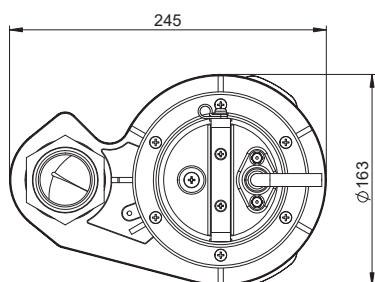

Weight : 6kg / 13.2 lbs

Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal		Single Mechanical Seal
		Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8